


HONDEX[®]

12.1" Chirp Echo Sounder
HE-2910

New Standard for Commercial Fishing

Chirp Enabled System

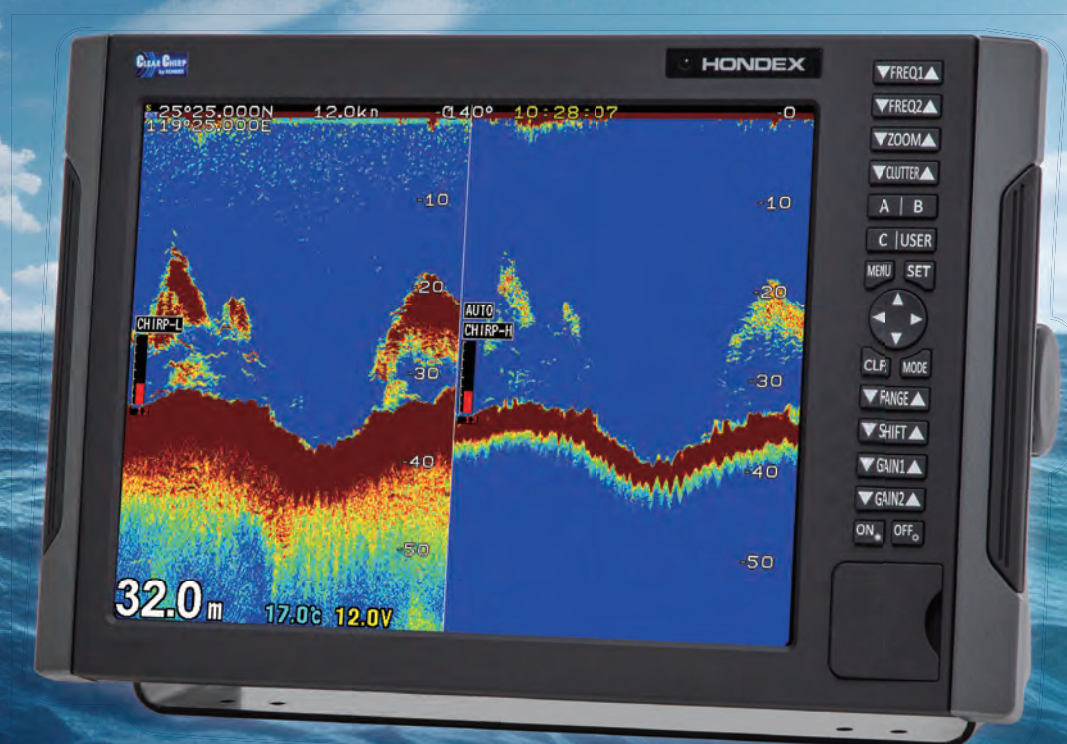

12.1" Chirp Echo Sounder
HE-2910
Chirp Model



HE-2910

Specifications

Operating Voltage	DC11-30V
Power Consumption	Approx. 25W
Dimension	W358 x D146 x H242
Weight	Approx.3.7kg
Display Style	Landscape
Number of pixel	800 × 600

Echo Sounder

Frequency	Chirp: 38-70kHz, 130-220kHz Traditional: 50/200kHz etc.
Output Power	1 to 5kW
Background	4 colors
Color Configuration	5 patterns

Chirp Frequency

High-Chirp	130-220kHz
Low-Chirp	38-70kHz

*when using chirp Transducers
*TD390:Dedicated Low-Chirp Transducer

In the Box

- HE-2910 Main Unit
- Power Cable: DC07



Main Unit



DC07

Options

- Water Temp(Thru-Hull) Kit: TC02CS(15m), TCK01
- Water Temp(Transom): TC03-05/10 (5m/10m)



TC02CS



TCK01



TC03-05/10

Compatible Transducer

Chirp



TD340 / TD340T
(1kW 38-70kHz, 1kW 130-220kHz)



TD360 / TD361
(2kW 38-70kHz, 1kW 130-220kHz)



TD380
(3kW 38-70kHz, 1kW 130-220kHz)



TD390
(5kW 38-70kHz)

Traditional



TD47T
(1kW/50&200kHz)



TD67T
(1.8kW 50kHz, 1kW 200kHz)



TD68
(2kW 50kHz, 1kW 200kHz)



TD86
(3kW 50kHz, 1kW 200kHz)



TD88
(3kW 28kHz)

TD93
(5kW 40&75kHz)

Specifications are subject to change without notice.

● Dealer



HONDA ELECTRONICS CO., LTD.

20 Oyamazuka, Oiwa-cho,
Toyohashi, Aichi 441-3193, Japan

<https://en.honda-el.co.jp/product/marine>



HONDEX is the registered trademark of HONDA ELECTRONICS CO.,LTD. in the United States, Japan and other countries.